





LOOK-C

Door Intercom Systems

2 Wires System

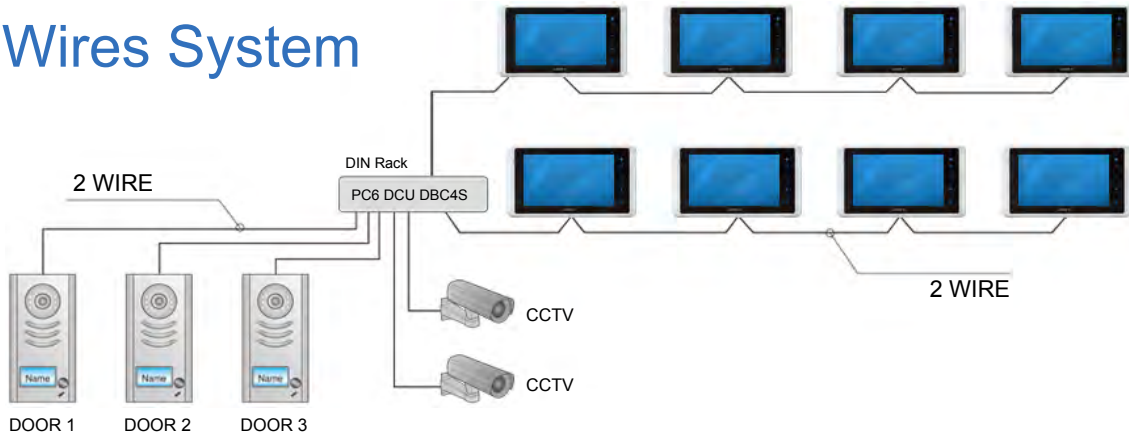

4 Wires System

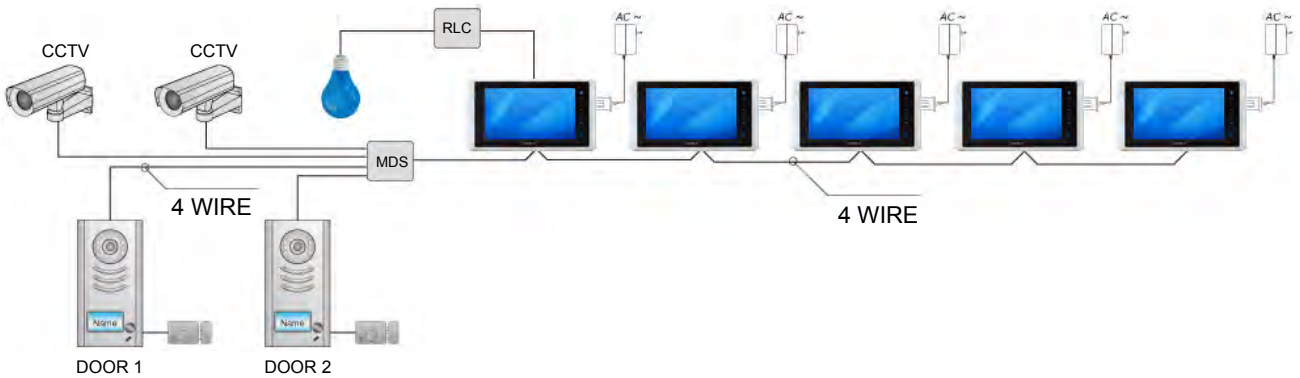

Latest in home door intercom innovation. Intelligent systems with easy installation. With design & style to suit your decor.

2013




LOOK-C DOOR SURVEILLANCE

→ Door Entry Security ↓ 2 Wire Audio

AUDIO-ONLY INTERCOM


DOOR ANSWERING SYSTEM

A basic system comprises a H2-595A Door station with bell press announce and 2 Way audio connects via the H2 2-Wire system to a H2-DJ4. Power is supplied by use of a 24Vdc power pack and a DPS power injector. An EL971 Door Catch can also be used for door entry. All items are sold separately.

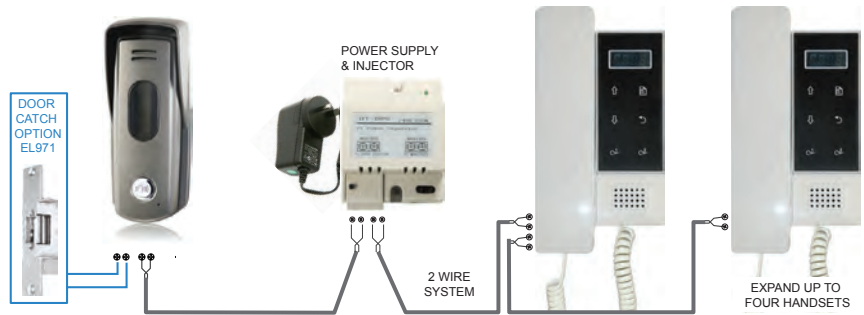

EXPANDABLE SYSTEM

The real value of this system is its expandability into an advanced programmable system of multiple door entry and monitors by use of additional H2 accessories. See manuals for details

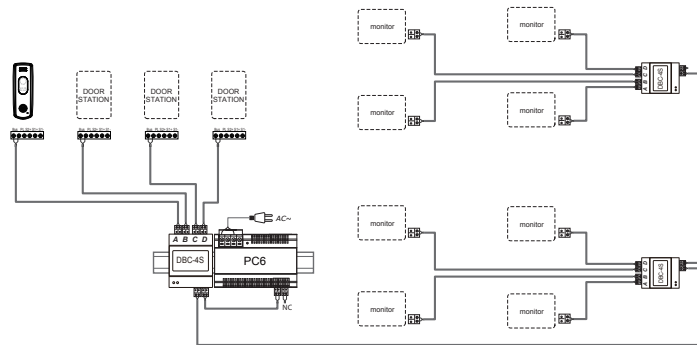

AUDIO-ONLY DOOR STATION

- Audio only, no camera.
- 2 Wire compatible.
- Door bell call button.
- Microphone and speaker to converse.
- LED indicators Talk/Unlock.
- Programmable unit ID Code.
- Door strike output optional.
- Metal construction IP55.
- 24Vdc 60/200mA
- 137x49x28mm

Code
H2-595A



AUDIO-ONLY HANDSET

- Handset audio only phone intercom & door answer
- Touch sensor button modern style with LED display
- Programmable ring tones for intercom or door station
- 2x door open buttons programmable from 4 doors
- Compatible with all H2 outdoor & Indoor stations
- 24V (25mA/110mA)
- 187x97x33mm

Code
H2-DJ4



RAIN HOOD

SUIT H2-595A

Outdoor weather resistant rain shield zinc alloy.

Code
RH595



ANGLE BRACKET

SUIT H2-595A

Tilt door station to the left or right 30°. Outdoor weather resistant zinc alloy.

Code
AB595



AUDIO-ONLY POWER REQUIRED

INJECTOR

Inserts power from a 24V source and inserts it into the twisted pair line.

Code
DPS



POWER PACK

As required to power the DPS injector.

Volts	Amps	Code
24V	1.2A	SMP24V-1.2A-21R







→ Door Entry Security ↓ 2 Wire Video

2 WIRE DOOR VIDEO INTERCOM SYSTEM

Latest in home door intercom innovation. Intelligent twin wire system that helps in creating a quick, simple and economical installation. System setup is easy via the comprehensive yet simple menu system. With design and style to suit today's modern home decors.

- No Polarity, twisted pair, easily to wire solution. Use CAT5 or twin core drop cable.
- One common power supply to all type solution. PC6 will run 6 units, more use PS524.
- Supports from 1 to a Max. of 16 Monitors connected in one system (Use DBC4S)
- One or up to a Max. of 4 door video stations (Optional DBC4S is required)
- Each door camera can control 2 locks. Door locks are an optional extra (EL971)
- All 2-Wire H2 products are compatible. All operate on the same twisted pair wire.

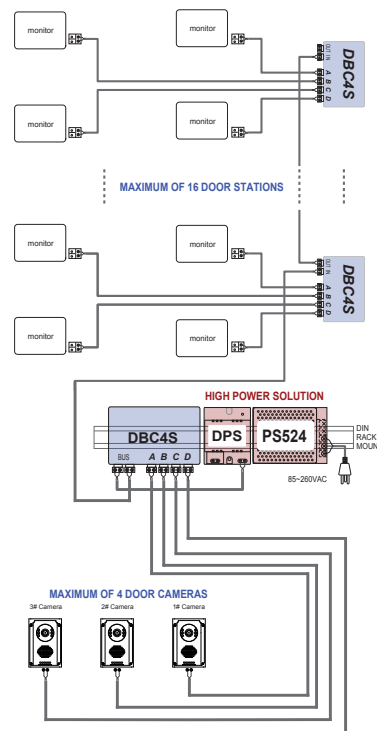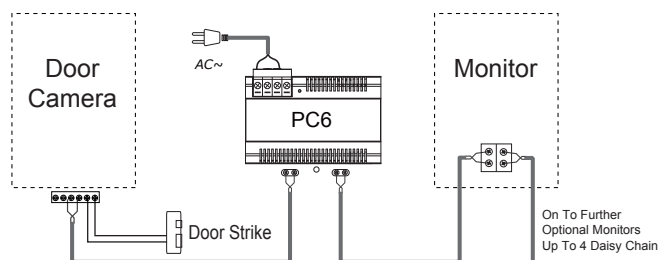

H2 SYSTEM FEATURE EXPANSION



DOOR ENTRY CAMERA

IP45 WEATHER PROOF OUTDOOR

Sharp Brand Color CCD Camera in a heavy-duty outdoor station with rain cover. Attractive and stylish zinc-alloy housing. Strong water proof & tamper proof design. Camera's viewing angle is adjustable. Name plate display with white LED lit. IR Illumination for 0 Lux night vision. 176x90x23mm. Requires cables.

Code
H291RH




DUPLEX CAMERA

ONE CAMERA TO TWO MONITORS

Dual door control for two dwellings (Duplex). Compatible with two (or more) 2-Wire monitors. Two door call buttons with illuminated labels. Requires install cable, power, monitors, etc. IR illuminated for 0 Lux night vision. Sharp brand colour CCD camera. Strong vandal proof design. Weather Shield. Outdoor. IP45. 176x90x23mm

Code
H292RH

Sold separately.
Requires cable
and monitors.



DOOR CAMERA KEYPAD

SURFACE MOUNT WITH RAIN HOOD

- Full stainless steel vandal proof
- 4mm plexiglass cover for protecting
- Keypad password access control
- Color CCD Camera with high resolution
- Name plate with background light
- Two locks control by separate password
- Max.80 groups passwords to be authorized to different users
- Infra-red LED for night view
- IP55 protection rate
- Rainy cover for surface mounting or full flush mounting by stainless steel panel
- H2 Two Wire Compatible

Code
H2-96KP

REQUIRES POWER

Requires external
12V-24V for keypad.

Code
SMP12V1A-21P



DOOR CAMERA RFID

SURFACE MOUNT WITH RAIN HOOD

- Stainless steel vandal proof design
- Proximity access control via RF
- Includes 5 programmable Key fobs
- Control 2 locks separately for each ID
- Color CCD Camera with high resolution
- Name plate with background light
- Infra-red LED for night view
- IP55 outdoor weather resistant
- Rainy cover for surface mounting
- Compatible with all H2 two wire system

Code
H2-96ID

REQUIRES POWER

Requires external
12V-24V for RFID.

Code
SMP12V1A-21P





LOOK-C DOOR SURVEILLANCE

→ Door Entry Security ↓ 2 Wire Video

3.5" LCD COLOUR VIDEO DOOR INTERCOM H2

2-WIRE STATION VERTICAL DESIGN

3.5" Color Digital TFT Screen 320x240px.
Compact and slim design to suit any decor.
White plastic casing with silver surround.
Modern vertical style, brushed aluminium trim.
Kit Includes monitor, powerpack DPS Injector.
All parts available separately for expansion.

- Entrance Monitoring view
- Auto On with Call button
- Converse with entrance
- Door open control with
- Optional Door Catch
- up to two locks per station
- Intercom between monitors
- Monitors naming function
- GUI Menu system
- Selectable door chime
- Adjustable picture
- Light On (Req. DCU)
- Expand up to 16 units
- 220x110x20mm
- 210mA (on)



Details	Code
Monitor w/ PC6	H216D
Monitor Only	M2-16

PC6 power supply and injector.

4" LCD COLOUR VIDEO DOOR INTERCOM H2

LOOK-C LOW-PROFILE WIDE-SCREEN

- High quality 4" TFT LCD Digital Screen
- Colour icon and text menu display OSD
- Plastic housing with aluminum front panel
- Streamlined & thin design. 23mm thin.
- Assorted melody chimes (x12) programmable
- Compatible with all H2 outdoor & Indoor stations
- Power Supply 24Vdc (Optional)
- Standby 15mA; Working status 210mA (on)
- 4" Digital 4:3 TFT 320*240 pixels
- Wiring: 2-wire (no polarity) up to 100M
- 200x135x23mm

Details	Code
Monitor w/ PC6	H2-254
Monitor Only	M2-254



7" LCD COLOUR VIDEO DOOR MONITOR - TOUCH SCREEN H2

HIGH-RESOLUTION MONITOR WITH VISITOR RECORDING FEATURE

7" Color Digital TFT Monitor with touch screen and SD card recording.
Low-profile minimalist style in ultra-modern contemporary design.
No protruding buttons! Super sleek touch control. Back illuminated.
Full colour High resolution TFT LCD 16:9 wide screen 800x480px.
Easy Icon GUI menu control for advanced feature set system.

- Digital TFT Screen
- Touch sensor button
- 118Mb Inner flash memory
- Max.16Gb SD card picture memory
- Home away auto memory
- 1/4/8 auto photo shooting
- Digital Photo Frame Playback
- Power supply: 24Vdc 400mA
- LCD 840x480px wide-screen
- 125x225x28mm



Record	Details	Code
No	Monitor w/ PC6	H2-27SDD
No	Monitor Only	M2-27SDD
Yes	Monitor w/ PC6	H2-27DT
Yes	Monitor Only	M2-27TD

PC6 Power Supply includes 24Vdc and Injector.
Accepts one or two door cameras, sold separately.
Expansion accessories available. See H2 system.

RECORDS VISITORS
10s. Video

EXPAND MEMORY
SD Card

PHOTO FRAME CYCLE

TOUCH SCREEN MENU

7" LCD HIGH-RES SCREEN

KIT INCLUDES CAMERA, MONITOR, & POWER SUPPLY
REQUIRES CABLE

HANDSET AUDIO-ONLY

- Handset audio only phone intercom & door answer
- Touch sensor button modern style with LED display
- Programmable ring tones for intercom or door station
- 2x door open buttons programmable from 4 doors
- Compatible with all H2 outdoor & Indoor stations
- 187x97x33mm 24V (25mA/110mA) 2 Wire system

Code
H2-DJ4





→ Door Entry Security ↓ 2 Wire Video

PC6 POWER SOLUTION H2

Single mains power supply solution for two wire H2 system. H2 product compatible. 100-240Vac input. 80cm Lead or screw terminal. 28Vdc 1500mA Injector. DIN mount 140x90x60mm..

Code
PC6



TWISTED PAIR DROP CABLE

High grade, high current, low loss, low capacitance. Extends distance of standard CAT5 runs by twice as far. Twisted pair in black PVC Jacket, ideal for running through walls and areas which are damp and prone to water penetration or applications where a better quality cable is required. 8mm Outer shield 1mm thick. 3mm with 48 strands x 0.2mm x 2 core.



Length	Code
100M	CAB4822


From	CAT5	CAB4822	DPS	CAT5	CAB4822	To
Camera	40M	80M	PC6	50M	100M	Monitor

POWER INJECTOR H2

ALLOWS THE INSERTING ANY 24V INTO THE H2 SYSTEM

2-Wire system requires power to be inserted into the line to power all cameras and monitors from one point. Din rail mount. Requires 24Vdc

Code
DPS

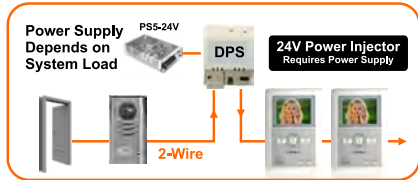

Injector Only.
Requires Power Supply.
24Vdc.

POWER SUPPLY OPTIONS FOR DPS


REQUIRES DPS H2 INJECTOR

2-Wire system is designed to be economical in power. For a single monitor and camera combination a 1A power supply will suffice, however, this may depend on losses over longer cables and expansion of system, etc. It is recommended that if the system is expanded using DBC4 then to use PS524V.



Description	Code
5.0A 24Vdc	PS524V
1.2A 24Vdc	SMP24V-1.2A-21R
2.5A 24Vdc**	SMP2500-24R
Power Lead	ACL104

**SMP2500-24R requires ACL104 Power Lead





SPLITTER 4-WAY H2

BRANCH CONTROLLER

Splits 2-Wire system into Four video output for monitors. Extra BDC4's can be added to the master line if required. or Four video inputs for combining door cameras with door control.

Code
DBC-4S

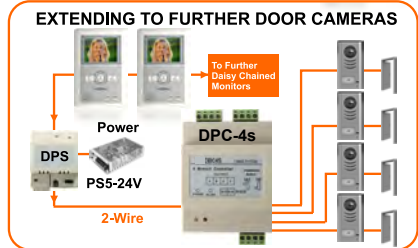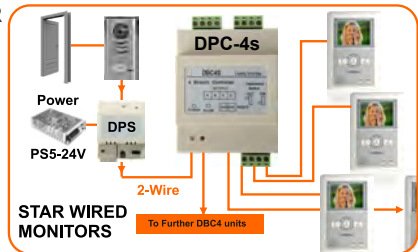


Accessories not included.

CCTV CONTROL UNIT H2

ANALOGUE VIDEO WITH LOCK CONTROL

Extend 2-Wire system to include an analogue camera input (up to 2 CCTV inputs). Includes 12Vdc out for camera power. Call button input. Control output for a door opener or light.

Code
DCU

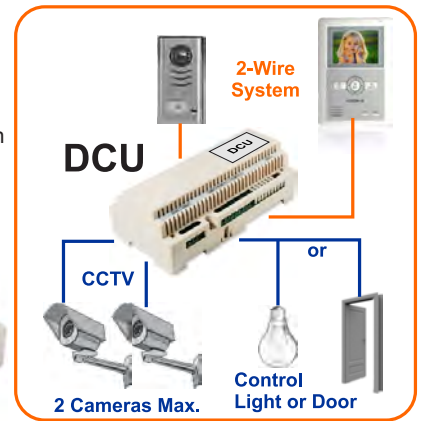


Accessories not included.

SPLITTER 2-WAY H2

2-WIRE BRANCH CONTROLLER

Alternative to daisy-chaining. Splits off main line for star wiring setups. Split a single line into two branches with one monitor on each. Each line length is up to 50 Metres. 2-Wire system compatible.

Code
DBC

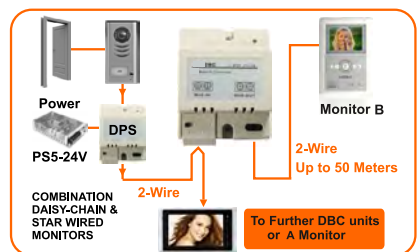


Accessories not included.

DOOR STRIKE

FAIL SECURE

Remote entrance Door catch release. Compatible with our door intercoms and other units. Requires a trigger of 12Vdc 500mA to enable a door to be pushed open. Mounts into the frame, replacing the door catch. Power supply NOT included.

Code
EL971

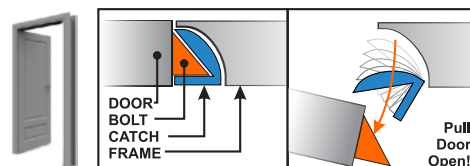



LOOK-C DOOR SURVEILLANCE


→ Door Entry Security ↓ 4 Wire Video

4 WIRE DOOR VIDEO INTERCOM SYSTEM

An easy to install digital colour video intercom system. Supplied as individual pieces so as to design your custom system that is expandable with additional items. Suitable for DIY home or office video security solutions. Add a door sentry today for low cost and peace of mind.

- 4 wires (polarized wiring) with simple setup.
- Cable is not supplied. Order to length required.
- Use common twisted pair (eg. CAT5) up to 100M.
- For lengths greater than 100M use H4BTU booster
- System is expandable from 1 to 5 indoor monitors.
- System is expandable from 1 to 4 outdoor stations or standard CCTV cameras with optional H4MDS switcher.
- H424 & H427 are compatible on the 4 wire system however not all features are shared (eg. memory).

H4MDS 4-WAY CAMERA SWITCH & DOORWAY CONTROLLER
For more cameras (up to 4) the additional H4MDS is required. H4MDS is also compatible with standard CCTV type cameras.

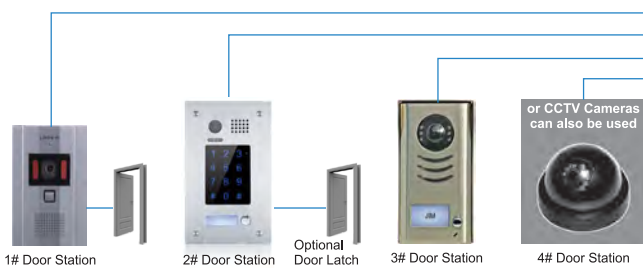

4 CORE CABLE
TESTED WITH CAT5 CABLE FOR UP TO 100 METRES FOR LONGER LENGTHS OR NOISY ENVIRONMENTS, SHIELDED CABLE IS AVAILABLE. PLEASE ENQUIRE

4" LCD COLOUR VIDEO DOOR INTERCOM H4

High resolution 4" TFT Digital LCD Screen in a wall-mount enclosure. Large illuminated talk button. Optional "unlock" door latch available. 210x160x25mm Low profile, attractive wall mount modern design. Intercom between additional monitors. Expands up to 5 units on a single 2-Wire system, up to 16 monitors with H4-MDS expansion module. Easy to install 4 Core cable solution. Order cable separately. Requires H4 system door station camera sold separately. Includes mains power adaptor for monitor (also runs the camera). Optional Memory Module stores images captured during door bell press.

Description	Code
4" Monitor	H424
Memory Module	H4MEM

Also available with video storage H4MEM captures any visitors while you are not at home.



7" LCD COLOUR VIDEO DOOR INTERCOM H427DT

LOOK-C LOW-PROFILE WIDE-SCREEN

Low-profile 23mm thick, 240x145mm monitor with frame in 2 colours. View full colour high resolution 7" TFT-LCD Screen 1440x234 pixels. Answer 1 or 2 doors via the video intercom (*up to 4 units w/ H4-MBF) Push-button door opening function (Requires optional door latch) Expandable system to more H427 & H424 monitors & door cameras. Simple 4-wire system (Cable Not Included) up to 100 Metres of CAT5. Attractive & stylish wall mount unit, easy to install, setup and operate. Includes mains power adaptor for monitor (and one camera). SD Card memory model is available optionally, see below.


Description	Code
7" Monitor	H427DT

OPTIONAL RECORDING FEATURE H4

128MB VIDEO MEMORY INBUILT - MicroSD EXPANDABLE

Automatic function for recording each door button press, ready for instant playback when you get home, to see who came while you were out! This unit stores 3x 10 second video captures plus a *SD micro expansion slot to extend this. Doubles as a Photo Frame SD memory image player too! *SD micro card up to 16GB is extra.

Description	Code
7" Monitor SD Memory	H427SDD
Monitor Star Splitter	H4BDU
Quad Screen	H4QSW
Remote Light Switch	H4RLC
4GB microSD flash Card	TFC4096



- TOUCH SCREEN OSD MENU**
- RECORDS 10 SECONDS ON EACH DOORBELL PRESS**
- BUILT-IN MEMORY PLUS SD-MICRO CARD SLOT MEMORY (Optional)**
- SD SLIDE-SHOW FEATURE CYCLES FAVOURITE PHOTOS**
- INTERCOMM (AUDIO ONLY) TALK BETWEEN BASE STATIONS**




→ Door Entry Security ↓ 4 Wire Video

TAMPER PROOF CAMERA

IP45 WEATHER PROOF OUTDOOR

Sharp Brand Color CCD Camera in a heavy-duty outdoor station with rainy cover. Attractive and stylish zinc-alloy housing. Strong waterproof & tamper-proof design. Camera's viewing angle is adjustable. Name plate display with white LED lit. IR Illumination for 0 Lux night vision. 176x90x23mm. Requires cables.

Code
H491RH



DOOR CAMERA KEYPAD

SURFACE MOUNT WITH RAIN HOOD

IP55 Full stainless steel vandal proof. Keypad password access control with Color CCD Camera. Name plate illuminated. Two locks control by separate password. H4 Four Wire Compatible.

Code
H4-96KP

REQUIRES POWER

Requires external 12V-24V for keypad.

Code
SMP12V1A-21P



DOOR CAMERA KEYPAD

FLUSH MOUNT

IP55 Full stainless steel vandal proof. Keypad password access control with Color CCD Camera. Name plate illuminated. Two locks control by separate password. H4 Four Wire Compatible.

Code
H4-96FKP

REQUIRES POWER

Requires external 12V-24V for keypad.

Code
SMP12V1A-21P



FLUSH MOUNT CAMERA

DOOR BELL INTERCOM

Attractive Silver colour plastic fascia. Door call-Button with camera and Inbuilt speaker & mic to suit the 4-Wire system. Zero Lux Night-View with IR Illumination 150x95x45mm (30mm flush mounted) Requires 4 core cable and monitor. Available in kit form with monitor. Cable and optional door catch not supplied.

Code
H484



RAIN SHIELD

Aluminium hood. Flush mount or adapts H484 to surface mount.

Code
RH584



DOOR CAMERA RF ID

SURFACE MOUNT WITH RAIN HOOD

IP55 Full stainless steel design. Includes 5 programable Keys for Proximity access control. Inbuilt Color CCD Camera. Name plate with background light. Two locks control by separately through EM key fob. Compatible with all H4 two wire system.

Code
H4-96ID



REQUIRES POWER

Requires external 12V-24V for RFID.

Code
SMP12V1A-21P



DOOR CAMERA RF ID

FLUSH MOUNT

IP55 Full stainless steel design. Includes 5 programable Keys for Proximity access control. Inbuilt Color CCD Camera. Name plate with background light. Two locks control by separately through EM key fob. Compatible with all H4 four wire system.

Code
H4-96FID



REQUIRES POWER

Requires external 12V-24V for RFID.

Code
SMP12V1A-21P




DUPLEX CAMERA

ONE CAMERA TO TWO MONITORS

Enables a single camera station to address Two separated video Look-C intercom systems (A/B). One camera with two door-bell buttons. Suit duplex house, business/ personal, granny-flat, dual-units, etc., etc. Requires Look-C 4-Wire monitors, Suitable for TWO doors. TWO door strikes. Requires 4 core cable. 196x112x39mm

Code
H4-86




IP45 CAMERA DUPLEX

SINGLE CAMERA TO TWO MONITORS

IP45 Weather resistant attractive Zinc alloy brushed aluminium styled door station with rain hood. Flush mount. Infrared illuminated. Dual name plate illuminated. Two button door bell push. 176x90x23mm

Code
H4-92RH



DOOR CAMERA COMPACT

- Zinc alloy housing attractive design
- Outstanding audio performance
- Wide angle color CCD Camera
- High resolution Sony ACS 4T DSP
- High white led light for night view
- IP55 protection rated outdoor
- Compact 137x49x28mm
- Available with/without rain cover

NO RAIN HOOD

Code
H4-595

WITH RAIN HOOD

Code
H4-595RH



ANGLE BRACKET

Tilts station left or right 30°

Code
AB595



LOOK-C DOOR SURVEILLANCE

→ Door Entry Security ↓ 4 Wire Video

HANDSET ONLY

EXPANSION OPTION WITHOUT MONITOR

Expands an existing intercom door answering system. Connects with any Look-C 4-Wire monitor units. Add-on to the monitor kit for use as an extra station for talking to other handsets, monitors or cameras. Buttons for answering/calling and door release control. Attractive white finish suits any decor. Wall mountable. System can include up to FIVE monitors and/or handsets. Three core cable for connecting to the system is required. No additional power is required. Suit 4-Wire system only.




Code
VT672

DOOR STRIKE

FAIL SECURE

Remote entrance Door catch release. Compatible with our door intercoms and other units. Requires a trigger of 12Vdc 500mA to enable a door to be pushed open. Mounts into the frame, replacing the door catch. Power supply NOT included.

Code
EL971

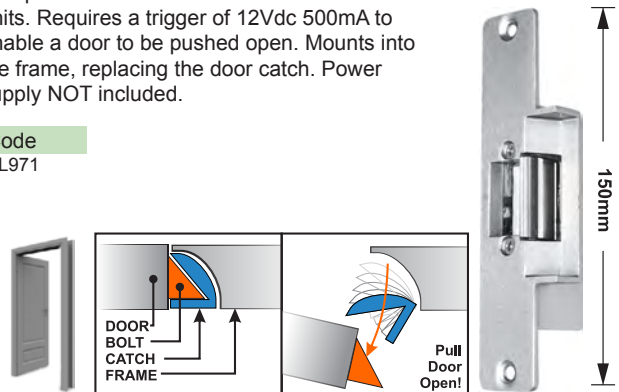

MULTIPLE CAMERA AUTO-SWITCH

UP TO 4 DOOR CAMERAS

Compatible with "Cycle View". Extends the 4-Wire system from 2 to 4 cameras total. Door strike control compatible. Works with video sources too! Connect cameras, CCTV, etc.



Code
H4MDS


4-WAY STAR WIRE SPLITTER

AND SIGNAL BOOSTER

4-Wire monitors are usually wired in daisy chain fashion. If star type branch wiring is required then use this splitter to up to 5 monitors. Also suitable for strengthening signals for longer noisy runs.



Code
H4BDU

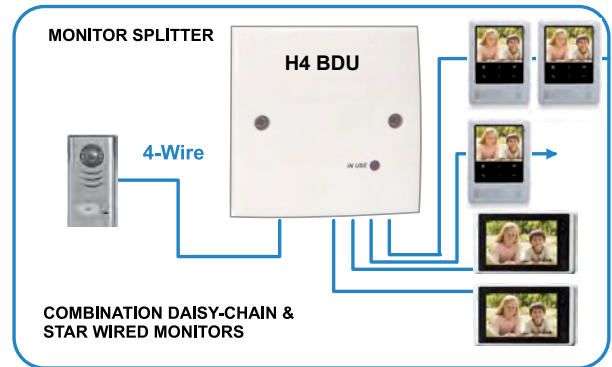

QUAD SCREEN & CAMERA MODULE ADD-ON

ALLOWS TO VIEW 4 CAMERAS ON ONE SCREEN

Enables combining 4 door cameras or normal composite cameras into the four wire system as well as also viewing all four cameras on a single screen by way of quad split screen. Quad or single viewing is switched at monitor.



Code
H4QSW


REMOTE SWITCH

LOW VOLTAGE LIGHT SWITCH

Enables control of a light or second door strike. Single pole, single throw, low voltage relay output.

Code
H4RLC

Connects inline with the 4-Wire system.

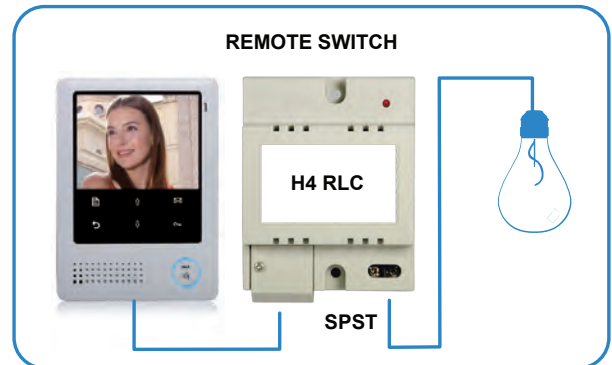



→ Door Entry Security ↓ 4 Wire B&W

B&W 4" CRT VIDEO DOOR PHONE HANDS-FREE

MONITOR & CAMERA KITS - H4 COMPATIBLE

Excellent economical solution with Low-profile side projection 4" B&W picture tube and IR Illuminated for bright and clear night viewing. Convenient hands-free view and hear operation. Auto-On screen and listen on door-bell press. Push-button to talk to your visitor before entry and allow them in with the optional EL971 Electronic release door catch actuator control. System is easily expandable with the addition of extra monitors (5) and/or extra door cameras (4). Intercom feature allows for communication between additional monitors in different rooms of the house. You can also integrate the B&W monitors in with Look-C range of Colour H4 System if desired (Colour door camera required for colour system)

REQUIRES 4-CORE TWISTED PAIR CABLE TO LENGTH


BLACK & WHITE KITS

Kit Includes one 4" B&W Monitor & one Door camera.
Requires connection cable. Monitor size 220x190x55mm
ADD MORE CAMERAS(2)* & MONITORS(5)
Up to 5 base monitors can all share on the one system.
Connect two cameras and door strikes to one system.
See and control extra doors with a CSM expansion module.
For 2 to 4 cameras added require H4-MDS Switcher to suit.

Description	Code
Base unit & H4-87 Surface Mount Camera	BWS68SU
Base unit & H4-84 Flush Mount Camera	BWS68FL

EXPANDABLE B&W SYSTEM ITEMS

Description	Code
Monitor Only	BWM68
Handset Audio Only (No Screen)	VT672
Surface Mount Camera Only	BWC580
Duplex Dual System Camera	BWC586
Door Camera Splitter Box	H4MDS
Door Strike	EL971
Weather Shield for cameras	RH584

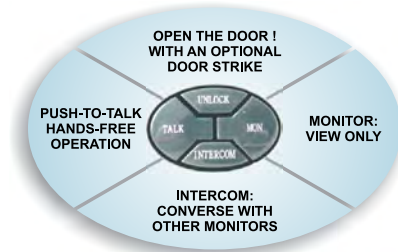

REQUIRES 4 CORE CABLE TO LENGTH...



**100x130x40mm
Surface Mount
H4-87**



**95x150x15/40mm
Flush Mount
H4-84**



**Rain Hood
Flush or Surface
RH584**



BWC586



**Handset Only
(No Video)
VT672**



**Expand to
4 Cameras.
CCTV Video
Compatible
H4 MDS**



**Branch
Splitter
H4 BDU**

REQUIRES CABLE

Cable is NOT included in any of the Look-C kits. 4 Core Low voltage "Bell wire" is required. eg. Telephone, CAT5 or security cable, etc. For runs up to 20M we recommend SEC414 (ACA Approved). For longer runs, CAT5 twisted pair type cable is quite suitable up to 100M. For electronically noisy environments or to ensure maximum picture quality we have available shielded coax cable with control wires.

Length	Description	Colour	Code
100M	Coax + 5 Control Wires	Cream	SEC7505
305M	Coax + 5 Control Wires	Cream	SEC17505
100M	8 Core Category-5e Cable	Blue	CNC5100BU
50M	8 Core Category-5e Cable	Blue	CL161
25M	8 Core Category-5e Cable	Blue	CL158



CAT5 cable is available in Blue, Yellow, Grey, Red, Green and Pink. Other lengths are also available. See Section 13 or 16 for CAT5 Cable.



**OPTIONAL DOOR STRIKE
REQUIRES 12V 500mA
Power Pack Not Inc.**

- **DOOR STRIKE EL971**
- Door-Strike Requires 12Vdc/500mA source, local or remote

Code
EL971





LOOK-C DOOR SURVEILLANCE

→ Door Entry Security ↓ 4 Wire Video


CONNECTION DIAGRAM SAMPLE

- NOTE: This is an example only. Extracted from 4 Wire 7" Installation Manual and may differ from other models.
- For more information and manuals to suit, see the "Resources" links below:

Basic Structure - Without Addition Parts


1 to 1 structure

This is the most common way to use the H4 system, it includes a Outdoor Station, a Monitor and an adapter.
 *Example only, diagram may change depending on model. See owners manual.

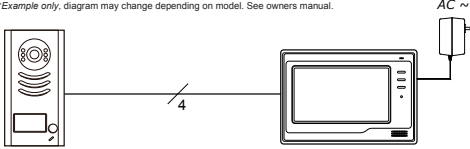

2 to N structure


Use the built-in two way connector to extend 2 Outdoor Stations and connect Multi Monitors directly(Max.5 Monitors).

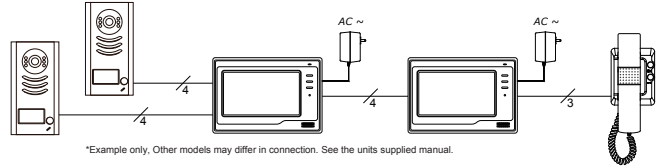

*Example only. Other models may differ in connection. See the units supplied manual.

2 to 1 structure


Use the built-in two way connector to extend 2 Outdoor Stations.

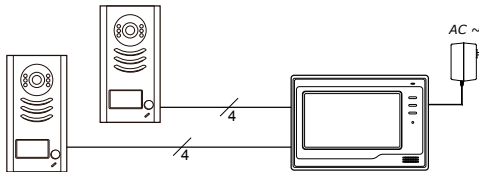

*Example only. Other models may differ in connection. See the units supplied manual.

CCTV camera connection


Use the built-in two way connector to extend a CCTV camera directly.

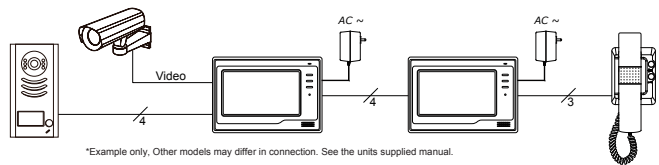

*Example only. Other models may differ in connection. See the units supplied manual.

1 to N structure


Extend Multi Monitors directly(Max.5 Monitors).

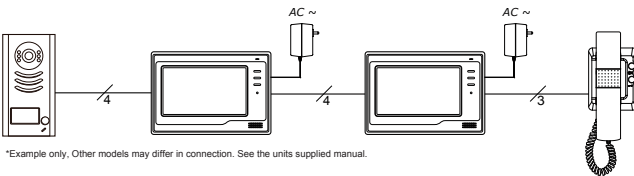

*Example only. Other models may differ in connection. See the units supplied manual.

Television connection

Connect television to the Monitor directly, video can be shifted and display on the television.

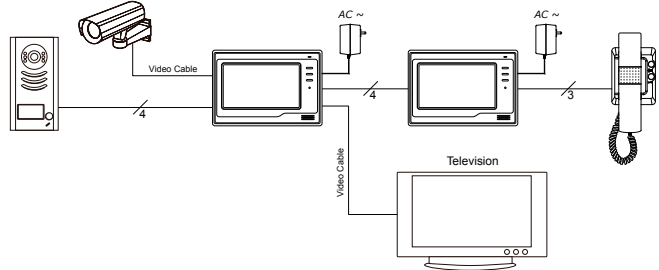


*Example only. Other models may differ in connection. See the units supplied manual.

Advanced Structure - With Additional Parts

MDS unit connection


Using the MDS (Multi Doorstation Switch) unit to extend 4 Door stations or CCTV cameras.

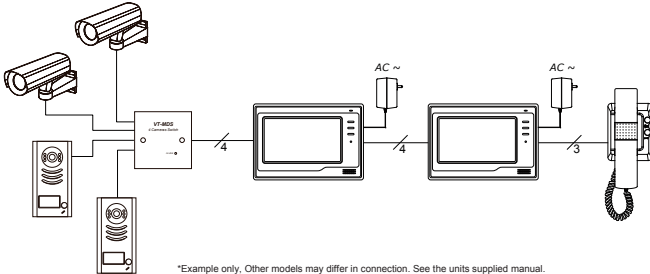

*Example only. Other models may differ in connection. See the units supplied manual.

RLC unit connection

Using the RLC (Lamp/Lock control) unit to control a lamp or an additional electronic lock.

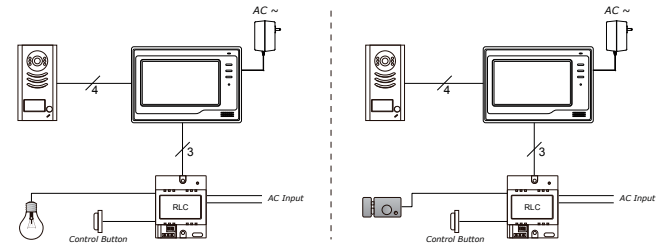

*Example only. Other models may differ in connection. See the units supplied manual.

RESOURCES

- <http://lookc.com.au>
- <http://lookc.com.au/product/homes-single-entry.html>
- **Available From:**
<http://www.wescomponents.com>
- **Marketing:**
<http://data.wescomponents.com/lookc/>
- **Manuals:**
<http://data.wescomponents.com/index.php?dir=lookc/>
http://data.wescomponents.com/lookc/H4_TechnicalManual.2012.pdf