



BOSCH

Invented for life

PLE-1SCS Plena Easy Line Heavy Duty Call Station



- ▶ **Sturdy microphone for demanding applications**
- ▶ **PTT-key for calls for activation**
- ▶ **Momentary or toggle**
- ▶ **Green LED, indicating microphone active**
- ▶ **Stable metal base design with fixed 2 m (6.56 ft) cable and lockable Euro style connector**
- ▶ **Phantom powered by amplifier**

The Plena tabletop microphone is a heavy-duty, high-quality tabletop unidirectional dynamic microphone, intended for making calls in a public address system. Its heavy metal base and rubber feet ensure stability on any flat surface. The special design also allows the unit to be neatly flush-mounted in desktops.

Functions

The PTT-key (press-to-talk), not only switches on the microphone, but also provides priority contacts, that are compatible with the Plena range of amplifiers. The switching characteristic of the PTT-key can be configured internally for PTT-mode (on as long as pressed) or toggle-mode (press to switch on, press again to switch off).

It is equipped with a fixed, flexible 2 m (6.56 ft) cable and a 5-pin Euro style connector for the balanced signal and the priority contact. If the priority contact is not required, the microphone can be connected to amplifiers with 3-pin Euro style connector.

A green LED indicates when the microphone is active.


Controls and indicators

- PTT-key
- PTT status LED


Certifications and Approvals

Safety	according to EN 60065
Immunity	according to EN 55103-2
Emission	according to EN 55103-1

Installation/Configuration Notes

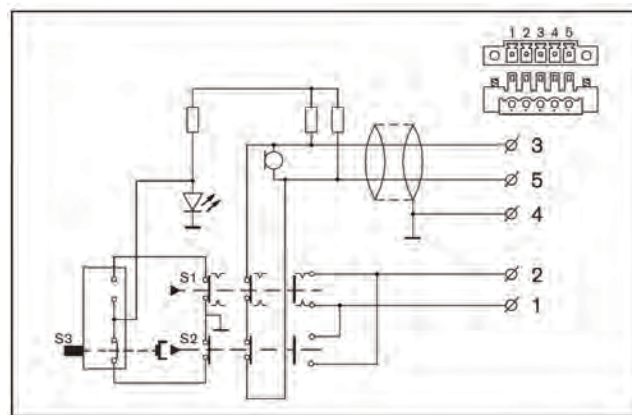

Circuit diagram

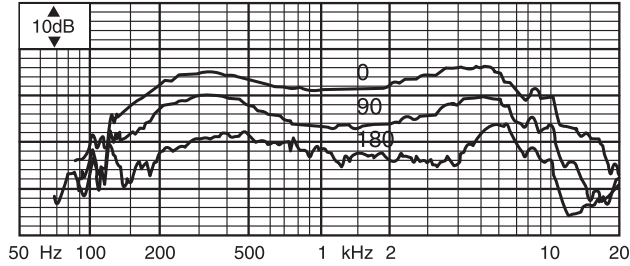

Frequency response

Ordering Information

PLE-1SCS Plena Easy Line Heavy Duty Call Station **PLE-1SCS**
 metal base design with fixed 2 m cable and lockable Euro style connector

Parts Included

Quantity	Component
1	PLE-1SCS Plena Easy Line Heavy Duty Call Station

Technical Specifications

Electrical

Phantom power supply

Voltage range	12 to 48 V
Current consumption	<8 mA

Performance

Polar pattern	Uni-directional
Frequency response	100 Hz to 15 kHz
Sensitivity	1.2 mV/pa +/- 4 dB
Rated output impedance	500 ohm
Maximum input sound level	110 dB SPL
Distortion	<0.6% (maximum input)
Input noise level (equiv.)	25 dB SPLA (S/N 69 dBA ref. 1 Pa)

Mechanical

Base dimensions (H x W x D)	40 x 100 x 235 mm (1.57 x 3.97 x 9.25 in)
Weight	Approx. 1 kg (2.2 lb)
Color	Charcoal with silver
Stem length with mic.	390 mm (15.35 in)
Cable length	2 m (6.56 ft)

Environmental

Operating temperature	-10 °C to +55 °C (14 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Americas:
 Bosch Communications Systems
 12000 Portland Avenue South
 Burnsville, Minnesota 55337, USA
 Phone: +1-800-392-3497
 Fax: +1-800-955-6831
 audiosupport@us.bosch.com
 www.boschsecurity.com

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: +31 40 2577 284
 Fax: +31 40 2577 330
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd
 11 Bishan Street 21
 Singapore 573943
 Phone: +65 6571 2600
 Fax: +65 6571 2698
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by